


Retractable C Steel LT M

Specification Sheet (Ref 243260-XXXXXX)

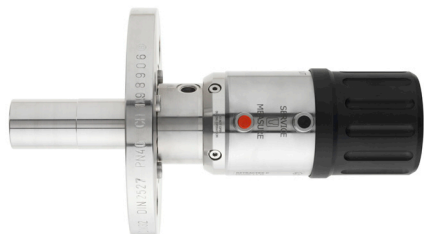

The retractable armature Retractable C Steel LT M was designed for harsh applications in the chemical industry. The compact design with a stroke of only 36 mm with a maximum insertion depth of 207 mm keeps wear on seals to a minimum and creates excellent reliability. It can be cleaned easily and thoroughly in place. It is designed for 12 mm sensors and is equipped with several safety features (e.g. no sensor – no insertion, window to check seals for leakage etc.) to provide operator safety.

Product Specifications


Armature Insertion Depth	Various (see Dimensions)
ATEX Approval	CE 0035 II 1/2 G Ex ia IIC T4/T5/T6 Ga/Gb CE 0035 II 1/2 D Ex ia IIIC T x °C Da/Db
Autoclavable	Insertion tube and rinsing chamber
Certificate	Yes, 3.1 certificate with heat number
CIP	Yes
Cleaning Pressure	1 to 4 bar
Cleaning Port connection	various (see Ordering Information)
Diameter	Various (see Dimensions)
Electrode Shaft Length	325 mm (pH, ORP) / 315 mm (DO,COND)
IECEX	CE 0035 II 1/2 G Ex ia IIC T4/T5/T6 Ga/Gb CE 0035 II 1/2 D Ex ia IIIC T x °C Da/Db
For Electrodes with	12 mm PG13,5
Materials	DIN 1.4404; DIN 2.4602; PA6.6 GF30; O-Ring see Ordering Information
Max Diameter	Various, depends on flange type
Max. Pressure	16 bar (120 °C), 10 bar (140 °C), see Process Conditions

Product Specifications (continued)


Medium Affected Materials	DIN 1.4404 or DIN 2.4602 and PTFE
Min. Total Length	Various (see Dimensions)
O-Ring Material	Various (see Ordering Information)
Operating Temperature Range	-10 to 140 °C (see Process Conditions)
Process Connections	Various process adapters (see Ordering Information)
Sensor Insertion Depth	Various (see Dimensions)
Serial Number	Yes
Steam Sterilizable	Yes
Surface Quality of Steel	Ra < 0.8 µm (N6) / Flange: < 1.6 µm (N7)

Process Conditions

Max. allowed pressure PS	16 bar
Max. allowed temperature TS	140 °C

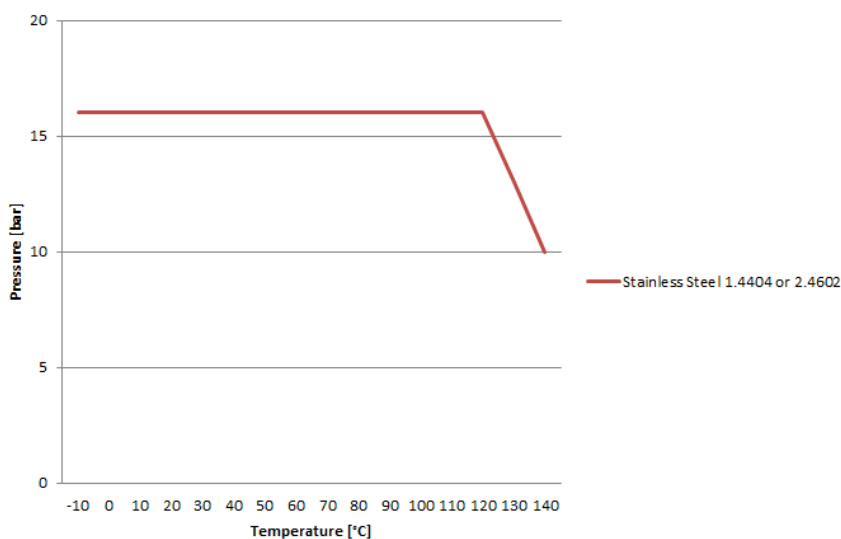

Dimensions




Holder

Dimensions	Retractable C Steel LT M
A ₁ [mm]	180
A ₂ [mm]	480
B [mm]	69

Dimensions (continued)

Process Connection Retractex C Steel LT M

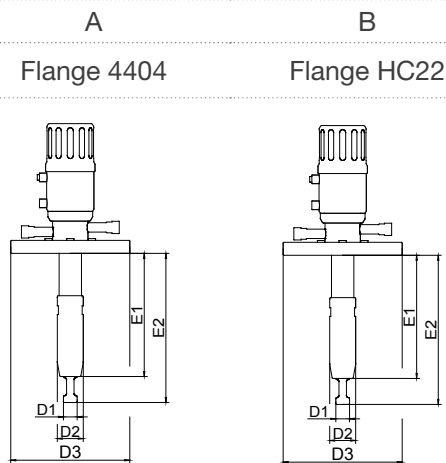

Dimensions	C Steel LT M	C Steel LT M
E1 [mm]	171	166
E2 [mm]	207	202
D1 [mm]	Ø 19	Ø 19
D2 [mm]	Ø 36	Ø 36
D3 [mm]	-	-

Ordering Information

Retractex C Retractable Holder

243260	Retractex C Steel LT M						
	Code	Holder, Wetted Material					
	1	Stainless Steel, 1.4404 (material certificate included)					
	2	Stainless Steel, 2.4602 (material certificate included)					
	0	Special Design					
		Code	Seals, Wetted Material				
		1	EPDM / FDA USP class VI (elastomer certificate)				
		2	FPM				
		3	FFPM				
		0	Special Design				
			Code	Sensor			
			1	325 mm PG13,5 filled with gel			
			0	Special Design			
				Code	Process Connection		
				1	Flange DN40 PN16		
				2	Flange DN50 PN16		
				3	Flange ANSI 1½" 150 lbs		
				4	Flange ANSI 2" 150 lbs		
				0	Special Design		
					Code	Cleaning Port	
					1	G ⅛" (internal)	
					2	G ¼" (internal)	
					3	¼" NPT (internal)	
					0	Special Design	
						Code	Position Reply
						1	Without
						0	Special Design
Ref: 243260 -							

Accessories and Spare Parts

Reference Number	Description
243211	Service Kit Retractex C LT EPDM
243212	Service Kit Retractex C LT FPM (Viton)
243213	Service Kit Retractex C LT FFPM (Kalrez)
243214	Insertion Tube Retractex C LT 1.4404 / 316L
243215	Insertion Tube Retractex C LT 2.4602 / Alloy C22
243206	Set blind plug G $\frac{1}{8}$ " 1.4301/316 for cleaning chamber
243256	Manual Drive Unit - sensor 225/325

© 2015 Hamilton Company. All rights reserved.
All trademarks are owned and/or registered by Hamilton Company in the U.S. and/or other countries.
REF 695191/00 – 09/2015

HAMILTON®

Web: www.hamiltoncompany.com

USA: 800-648-5950

Europe: +41-58-610-10-10

Hamilton Americas & Pacific Rim

4970 Energy Way
Reno, Nevada 89502 USA
Tel: +1-775-858-3000
Fax: +1-775-856-7259
sales@hamiltoncompany.com

Hamilton Europe, Asia, & Africa

Via Crusch 8
CH-7402 Bonaduz, Switzerland
Tel: +41-58-610-10-10
Fax: +41-58-610-00-10
contact.pa.ch@hamilton.ch

To find a representative in your area, please visit hamiltoncompany.com/contacts.